





WPA-R SERIES SPECIFICATIONS (METRIC)

Model	Reservoir Type	Reservoir		Remote Type	Remote Wire Length	Air Supply Required	Flow Rate		oil port	weight
		capacity	usable				@0 bar	@700 bar		
		L	L				L/min	L/min		kg
WPA-1R	Polyethylene reservoir	1.7	1.6	wire	2.5	3-8	1.22	0.095	3/8 NPT	6.6
WPA-2R	Aluminum reservoir	1.7	1.6	wire	2.5	3-8	1.22	0.095	3/8 NPT	7.6
WPA-3R	Polyethylene reservoir	2.4	2.3	wire	2.5	3-8	1.22	0.095	3/8 NPT	7.4
WPA-3RW	Polyethylene reservoir	3.8	3.7	wireless	/	3-8	1.22	0.095	3/8 NPT	7.5
WPA-4R	Steel reservoir	3.8	3.7	wire	2.5	3-8	1.22	0.095	3/8 NPT	12.6

Wire/wireless remote controlling pump, which can be suitable for different working situations.

1. The pump is smart and portable with small size and light package, which is widely used for single-acting cylinders.
2. High quality seals and reasonable structure supply a strong force & excellent pressure-holding performance.
3. Every part of the pump is processed fine and durable.
4. With easy-economical repair unit, the pump can be used for long time with these recycle parts.

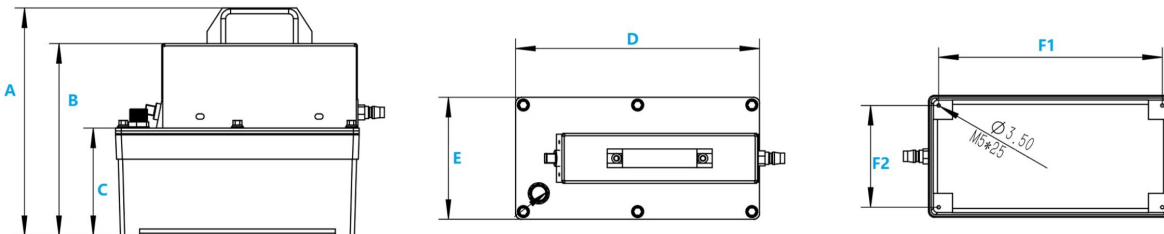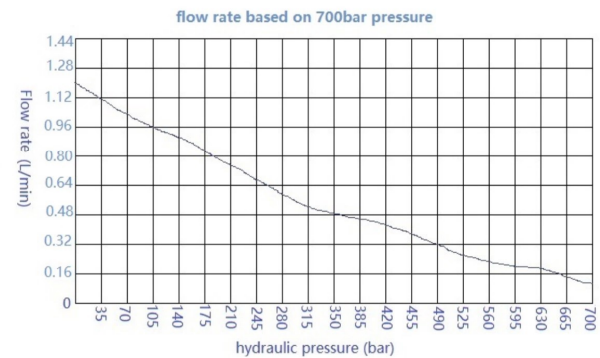

WPA-R SERIES DIMENSIONS SHEET (METRIC)

Item No.	A	B	C	D	E	F1*F2
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
WPA-1R	237	200	113	255	128	233*105
WPA-2R	237	200	113	263	136	234*107
WPA-3R	230	193	115	315	175	220*102
WPA-3RW	241	203	115	315	175	220*102
WPA-4R	217	180	102	330	190	/