

WPA SERIES

Air Hydraulic Pump Foot Operated, Single Action



WPA-1



WPA-2



WPA-3





WPA-4

WPA SERIES SPECIFICATIONS (METRIC)

Model	Reservoir Type	Reservoir		Air Supply Required	Flow Rate		oil port	weight
		capacity	usable		@0 psi	@700 psi		kg
		L	L		L/min	L/min		
WPA-1	Polyethylene reservoir	1.7	1.6	3-8	1.22	0.095	3/8 NPT	6
WPA-2	Aluminum reservoir	1.7	1.6	3-8	1.22	0.095	3/8 NPT	7
WPA-3	Polyethylene reservoir	2.4	2.3	3-8	1.22	0.095	3/8 NPT	6.8
WPA-4	Steel reservoir	3.8	3.7	3-8	1.22	0.095	3/8 NPT	12

1. The pump is smart and portable with small size and light package, which is widely used for single-acting cylinders.
2. High quality seals and reasonable structure supply a strong force & excellent pressure-holding performance.
3. Every part of the pump is processed fine and durable.
4. With easy-economical repair unit, the pump can be used for long time with these recycle parts.

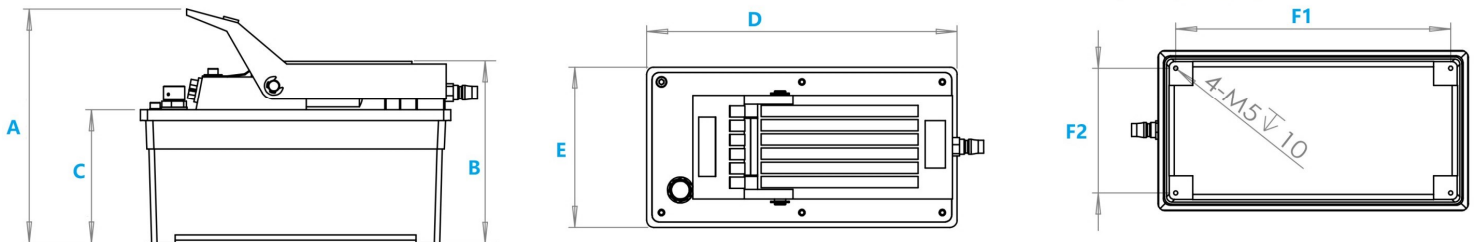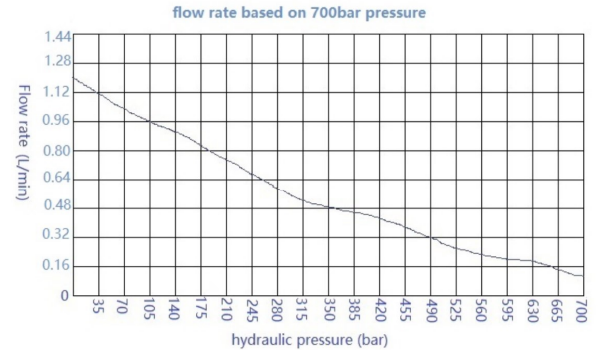

WPA SERIES DIMENSIONS SHEET (IMPERIAL)

Item No.	A	B	C	D	E	F1*F2
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
W-DA1	200	148	113	255	128	233*105
W-DA2	200	148	113	263	136	234*107
W-DA3	210	153	115	315	175	220*102
W-DA4	195	152	102	330	190	/